

LITHIUM BATTERIES

LiFePO₄

Upower
ecoline



EL TEJADO SOLAR.COM

CREAMOS LA ENERGÍA VERDE

info@eltejadosolar.com

Telf: 965 055 969

Telf: 668 636 637



UE SERIES

UE-FT-12Li100



12.8 V



100 Ah

**MASTER
BATTERY**



Paseo de Extremadura, 39 - 28935 Móstoles - Madrid (Spain)

Tel. +34 918 021 649 - Fax. +34 917 750 542

info@masterbattery.es - www.masterbattery.es/en


zeroCO₂

PRODUCT DESCRIPTION

Lithium-ferrophosphate (LiFePO₄) battery designed to replace lead-acid with better performance:

- Very high energy density and capacity.
- Longer useful life.
- Greater safety (no maintenance).
- Parallelisable and can be assembled up to 4 units (4x4).

APPLICATIONS

- UPS/EPS
- TELECOM
- Accumulation of solar surplus
- Autonomous mobility


MAIN TECHNICAL SPECIFICATIONS

Rated Capacity:		100 Ah
Rated Voltage:		12,8 V
Recommended Charge Current:	(0.2 C)	20 A
Maximum Charge Current (*):		100 A
Recommended Discharge Current:	(0.2 C)	20 A
Maximum Discharge Current (*):		100 A
Life Cycles:	(100% DoD)	2500 cycles
Operating Temperature:	Charge:	0°C ~ 45°C
	Discharge:	-20°C ~ 60°C
Storage Temperature:		-10°C ~ 35°C







(*) Charging and discharging at higher than recommended currents can cause a decrease in the performance and life expectancy of the battery.



DIMENSIONS

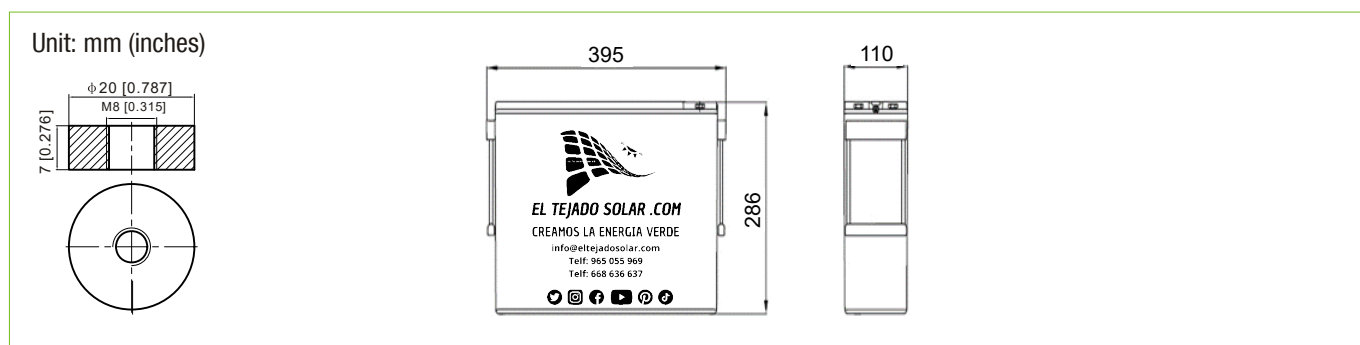

OPERATING CURVES

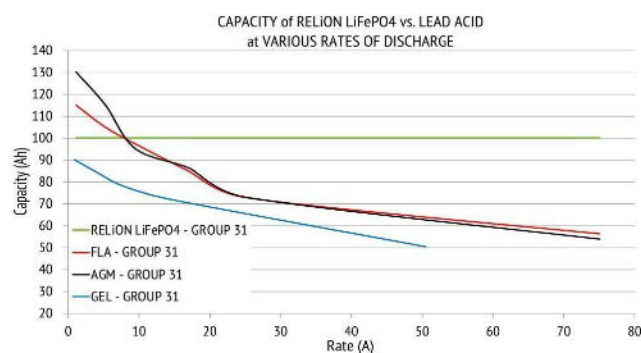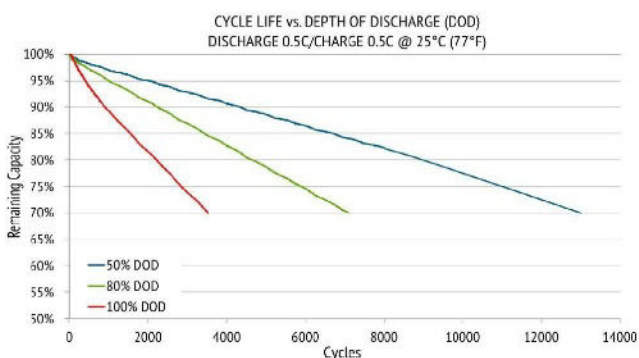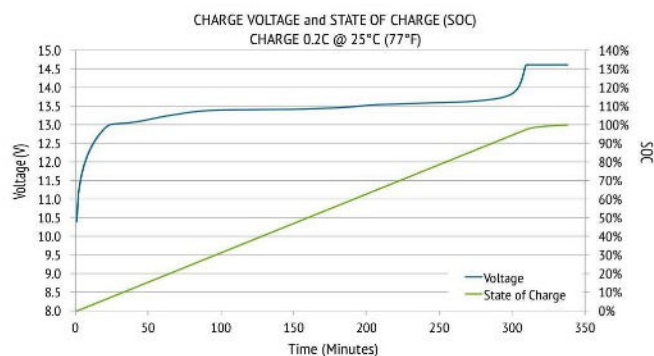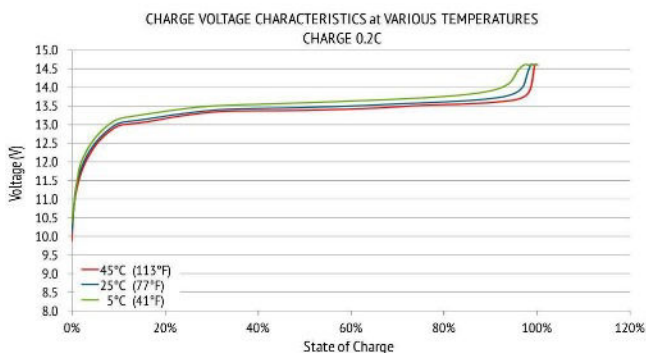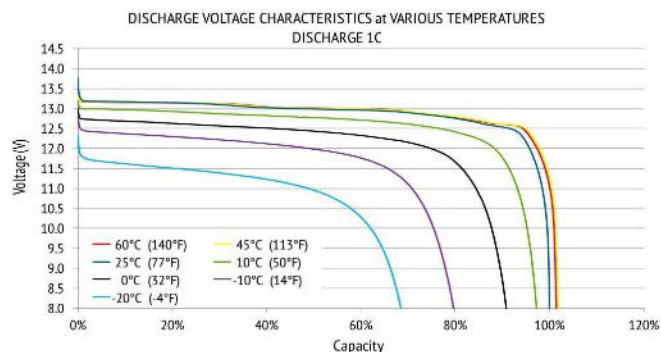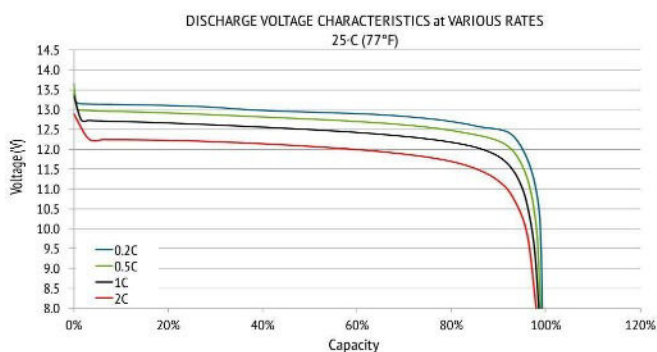

UE-FT-12Li100

UE SERIES

ELECTRICAL SPECIFICATIONS

Charge Voltage:	14.6 V
Discharge Cutoff Voltage:	10 V
Internal Resistance:	$\leq 10 \text{ m}\Omega$

OTHER SPECIFICATIONS

Dimensions (L x W x H):	395 x 110 x 286 mm
Weight:	Approx. 10 kg
Output Connector:	M8

PROTECTIONS

Overload Protection
Overload Protection
Load/Discharge Overvoltage Protection
Short Circuit Protection
Excessive Temperature Protection

CERTIFICATIONS

UN 38.8 MSDS , DG certificate, CE

