

615W

LB
Series



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Telf: 965 055 969

Telf: 668 636 637



Higher power generation better LCOE



n-type with very Lower LID



Better Temperature Coefficient



Better low irradiance response



12-year product warranty



30-year linear power output warranty

n-type Bifacial Double Glass High Efficiency Mono Module JAM66D45 LB

590-615



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Telf: 965 055 969

Telf: 668 636 637




Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing





615W

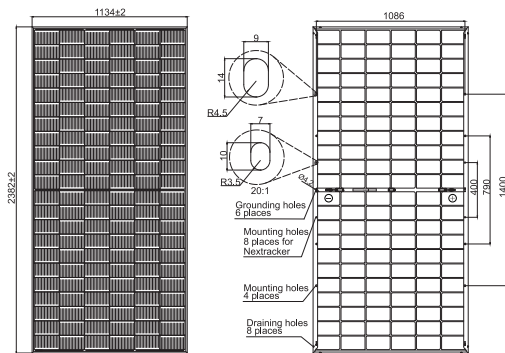590-615
JAM66D45LB
Series

Remark: customized frame color and cable length available upon request



Cell	Mono-16BB
Weight	33.1kg
Dimensions	2382±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-); 800mm(+)/800mm(-)(Leapfrog) Landscape: 1500mm(+)/1500mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM66D45 -590/LB	JAM66D45 -595/LB	JAM66D45 -600/LB	JAM66D45 -605/LB	JAM66D45 -610/LB	JAM66D45 -615/LB
Rated Maximum Power(P _{max}) [W]	590	595	600	605	610	615
Open Circuit Voltage(V _{oc}) [V]	47.30	47.50	47.70	47.90	48.10	48.30
Maximum Power Voltage(V _{mp}) [V]	39.09	39.27	39.44	39.60	39.77	39.96
Short Circuit Current(I _{sc}) [A]	15.85	15.90	15.95	16.00	16.05	16.10
Maximum Power Current(I _{mp}) [A]	15.09	15.15	15.21	15.28	15.34	15.39
Module Efficiency [%]	21.8	22.0	22.2	22.4	22.6	22.8
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.046%/ °C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.260%/ °C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.300%/ °C					
STC	Irradiance 1000W/m ² , cell temperature 25 °C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO


TYPE	JAM66D45 -590/LB	JAM66D45 -595/LB	JAM66D45 -600/LB	JAM66D45 -605/LB	JAM66D45 -610/LB	JAM66D45 -615/LB
Rated Max Power(P _{max}) [W]	637	643	648	653	659	664
Open Circuit Voltage(V _{oc}) [V]	47.30	47.50	47.70	47.90	48.10	48.30
Max Power Voltage(V _{mp}) [V]	39.09	39.27	39.44	39.60	39.77	39.96
Short Circuit Current(I _{sc}) [A]	17.12	17.17	17.23	17.28	17.33	17.39
Max Power Current(I _{mp}) [A]	16.30	16.36	16.43	16.50	16.56	16.62
Irradiation Ratio (rear/front)	10%					

*For NexTracker installations, maximum static load please take compatibility approve letter between JA Solar and NexTracker for reference.


**Bifaciality=P_{max, rear}/Rated P_{max, front}

CHARACTERISTICS


Current-Voltage Curve JAM66D45-600/LB

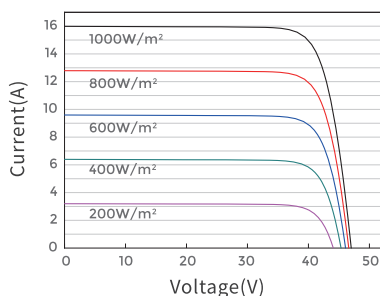

Power-Voltage Curve JAM66D45-600/LB

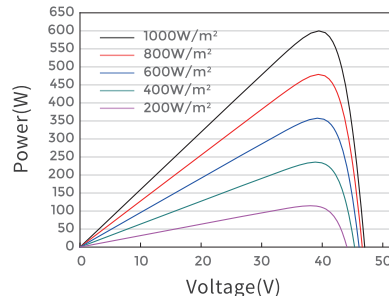


Current-Voltage Curve JAM66D45-600/LB

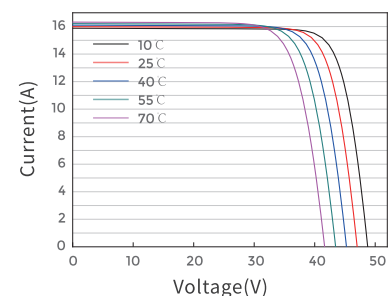

Superior Warranty

1% 1st-year Degradation
0.4% Annual Degradation Over 30 years

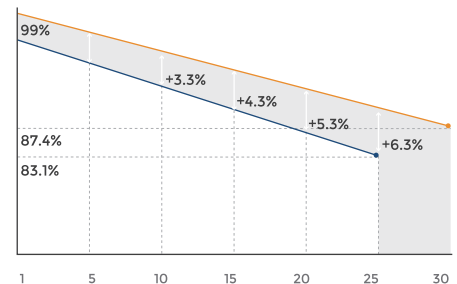

- n-type Bifacial Double Glass Module Linear Performance Warranty
- Standard Module Linear Performance Warranty

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40 °C ~ +85 °C
Maximum Series Fuse Rating	35A
Maximum Static Load, Front*	5400Pa (112 lb/ft ²)
Maximum Static Load, Back*	2400Pa (50 lb/ft ²)
NOCT	45±2 °C
Bifaciality**	80%±10%
Fire Performance	UL Type 29

