



Comet 2N

ABC N-Type

Mono-Glass Model



Up to **23.7%**
605W-625W



Product
Warranty



Performance
Warranty



reddot winner 2023

Premium Appearance

No grid lines on the front

Higher Power Output

Higher efficiency: 23.7%

Lower degradation: 1 year $\leq 1.0\%$, 2 -30 year $\leq 0.35\%$

Better temperature coefficient: $-0.26\%/^{\circ}\text{C}$

Optimized Balance of System (BOS)

Significant savings on mounting structure, cabling, and labour cost

Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

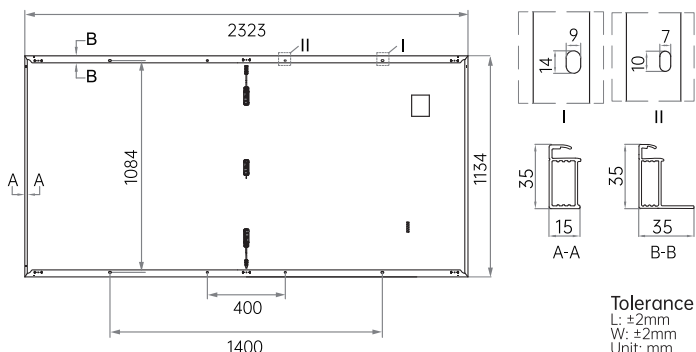
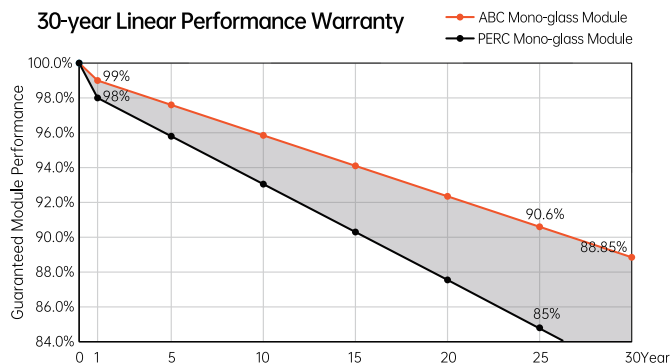
ISO 45001:2018 Occupational Safety and Management System



625W
Output

23.7%
Efficiency

 $\leq 1\%$
First-year Degradation

 $\leq 0.35\%$
Annual Degradation from Year 2-30

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ + 3%

Model	AIKO-A605-MAH72Mw		AIKO-A610-MAH72Mw		AIKO-A615-MAH72Mw		AIKO-A620-MAH72Mw		AIKO-A625-MAH72Mw	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P_{max} [W]	605	456	610	459	615	463	620	467	625	471
V_{oc} [V]	54.09	51.08	54.19	51.18	54.29	51.27	54.39	51.36	54.49	51.46
V_{mp} [V]	44.78	42.29	44.88	42.38	44.98	42.48	45.08	42.57	45.18	42.67
I_{sc} [A]	14.28	11.55	14.36	11.61	14.44	11.68	14.52	11.74	14.60	11.81
I_{mp} [A]	13.52	10.79	13.60	10.85	13.68	10.91	13.76	10.98	13.84	11.04
Module Efficiency	23.0%		23.2%		23.3%		23.5%		23.7%	

EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

Mechanical Specification

Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 350mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, three bypass diodes
Connector	MC4 Compatible
Weight	31kg±3%
Dimension	2323*1134*35mm
Package Detail	31pcs per pallet/155 pcs per 20' GQ/620pcs per 40' HQ

Temperature Ratings (STC)
Temperature Coefficient of I_{sc} + 0.05%/ °CTemperature Coefficient of V_{oc} - 0.22%/ °CTemperature Coefficient of P_{max} - 0.26%/ °C
Installation Guide

Operation Temperature - 40°C~+85°C

Maximum Series Fuse Rating 25A

Protection Class Class II

 V_{oc} and I_{sc} Tolerance ±3%

Maximum System Voltage DC1500V

Maximum Static Loading Front 5400Pa Back 2400Pa

Hail Test 25 mm diameter hail at 23 m/s

Fire Rating IEC Class C