

Harvest the Sunshine


650W



JA SOLAR

JAM72D42 LB n-type Double Glass Bifacial Modules

Premium Cells



MBB Half-Cell Technology

26%
Up To

Cell Conversion Efficiency



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Tel: 965 055 969

Tel: 668 636 637



Premium Modules



Higher power generation better LCOE




n-type with very Lower LID



Better Temperature Coefficient



Better low irradiance response

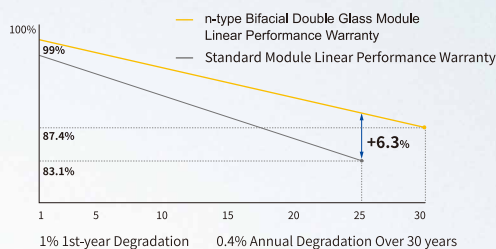

12-year product warranty

30-year linear power output warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE


info@eltejadosolar.com

Tel: 965 055 969

Tel: 668 636 637



DEEP BLUE 4.0 Pro

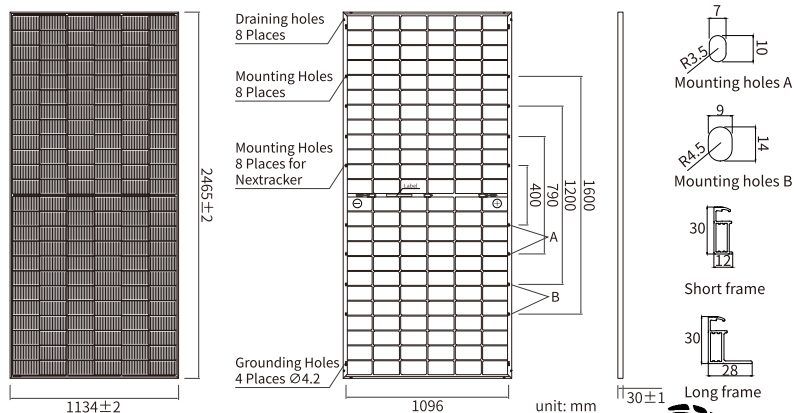

EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Tel: 965 055 969

Tel: 668 636 637

MECHANICAL PARAMETERS

Cell	Mono
Weight	34.6kg
Dimensions	2465±2mm × 1134±2mm × 30±1mm
Cable Cross Section Size	4mm²(IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1400mm(+)/1400mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 576pcs/40HQ Container

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D42 -625/LB	JAM72D42 -630/LB	JAM72D42 -635/LB	JAM72D42 -640/LB	JAM72D42 -645/LB	JAM72D42 -650/LB
Rated Maximum Power(Pmax) [W]	625	630	635	640	645	650
Open Circuit Voltage (Voc) [V]	52.27	52.47	52.67	52.87	53.07	53.27
Maximum Power Voltage(Vmp) [V]	43.71	43.90	44.10	44.29	44.49	44.67
Short Circuit Current(Isc) [A]	15.16	15.21	15.26	15.31	15.36	15.41
Maximum Power Current(Imp) [A]	14.30	14.35	14.40	14.45	14.50	14.55
Module Efficiency [%]	22.4	22.5	22.7	22.9	23.1	23.3
Power Tolerance	0~+3%					
Temperature Coefficient of Isc(α _{Isc})	+0.045%/°C					
Temperature Coefficient of Voc (β _{Voc})	-0.250%/°C					
Temperature Coefficient of Pmax(γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m², cell temperature 25°C, AM1.5G					



Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM72D42 -625/LB	JAM72D42 -630/LB	JAM72D42 -635/LB	JAM72D42 -640/LB	JAM72D42 -645/LB	JAM72D42 -650/LB
Rated Max Power(Pmax) [W]	675	680	686	691	697	702
Open Circuit Voltage(Voc) [V]	52.27	52.47	52.67	52.87	53.07	53.27
Max Power Voltage(Vmp) [V]	43.71	43.90	44.10	44.29	44.49	44.67
Short Circuit Current(Isc) [A]	16.37	16.43	16.48	16.53	16.59	16.64
Max Power Current(Imp) [A]	15.44	15.50	15.55	15.61	15.66	15.71
Irradiation Ratio (rear/front)	10%					

* For Nextacker installations, maximum static load please take compatibility approve letter between JA Solar and Nextacker for reference.

CHARACTERISTICS

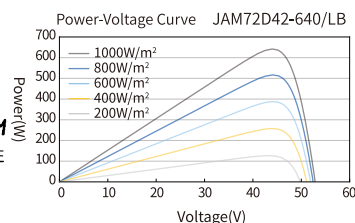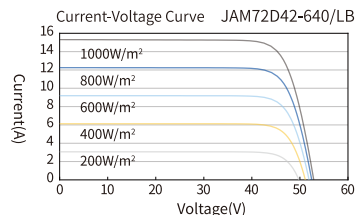

EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Tel: 965 055 969

Tel: 668 636 637



OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front*	5400Pa(112 lb/ft²)
Maximum Static Load, Back*	2400Pa(50 lb/ft²)
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	EL TEJADO SOLAR .COM Class II
Fire Performance	CREAMOS LA ENERGIA VERDE UL Type 29/Class C



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Tel: 965 055 969

Tel: 668 636 637

