

Harvest the Sunshine

605W




JA SOLAR

JAM72D40 MB

n-type Double Glass Bifacial Modules

Premium Cells




MBB Half-Cell
Technology

26%



Cell Conversion
Efficiency



EL TEJADO SOLAR .COM

CREAMOS LA ENERGIA VERDE

info@eltejadosolar.com

Telf: 965 055 969

Telf: 668 636 637



Premium Modules



Higher power
generation better LCOE





n-type with very
Lower LID



Better Temperature
Coefficient



Better low irradiance
response

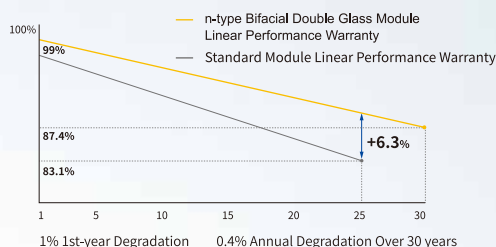

Comprehensive Certificates


- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



DEEP BLUE 4.0 Pro

JAM72D40 MB

n-type Double Glass Bifacial Modules

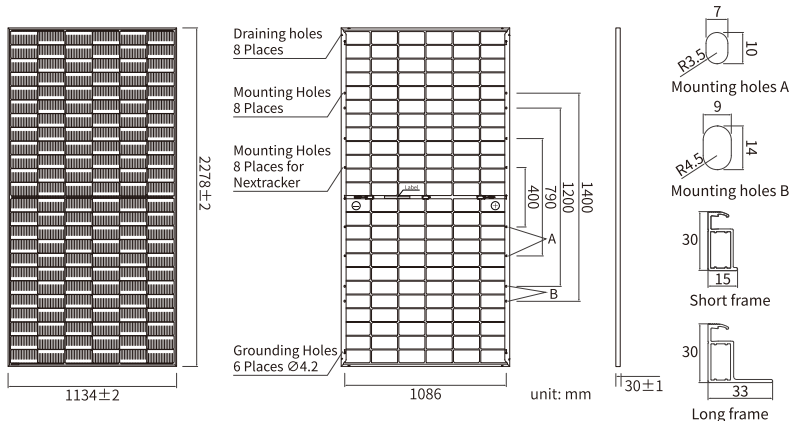

MECHANICAL PARAMETERS

Cell	Mono
Weight	31.8kg
Dimensions	2278±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm²(IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-) Landscape: 1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container

Remark: customized frame color and cable length available upon request



ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D40 -580/MB	JAM72D40 -585/MB	JAM72D40 -590/MB	JAM72D40 -595/MB	JAM72D40 -600/MB	JAM72D40 -605/MB
Rated Maximum Power(P _{max}) [W]	580	585	590	595	600	605
Open Circuit Voltage (V _{oc}) [V]	51.95	52.16	52.37	52.58	52.79	53.00
Maximum Power Voltage(V _{mp}) [V]	44.02	44.22	44.43	44.64	44.85	45.05
Short Circuit Current(I _{sc}) [A]	13.84	13.89	13.94	13.99	14.04	14.09
Maximum Power Current(I _{mp}) [A]	13.17	13.23	13.28	13.33	13.38	13.43
Module Efficiency [%]	22.5	22.6	22.8	23.0	23.2	23.4
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.250%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.290%/°C					

STC Irradiance 1000W/m², cell temperature 25°C, AM1.5G

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

CHARACTERISTICS

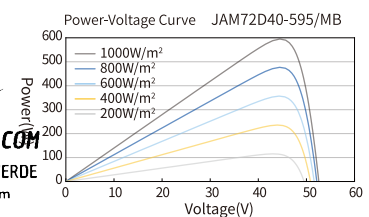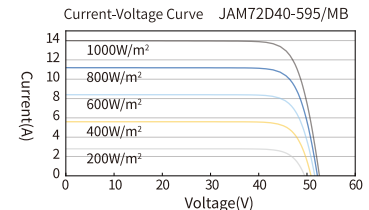

EL TEJADO SOLAR .COM
CREAMOS LA ENERGIA VERDE
info@eltejadosolar.com
Telf: 965 055 969
Telf: 668 636 637



OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front*	5400Pa(112 lb/ft²)
Maximum Static Load, Back*	2400Pa(50 lb/ft²)
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM72D40 -580/MB	JAM72D40 -585/MB	JAM72D40 -590/MB	JAM72D40 -595/MB	JAM72D40 -600/MB	JAM72D40 -605/MB
Rated Max Power(P _{max}) [W]	626	632	637	643	648	653
Open Circuit Voltage(V _{oc}) [V]	51.95	52.16	52.37	52.58	52.79	53.00
Max Power Voltage(V _{mp}) [V]	44.02	44.22	44.43	44.64	44.85	45.05
Short Circuit Current(I _{sc}) [A]	14.95	15.00	15.06	15.11	15.16	15.22
Max Power Current(I _{mp}) [A]	14.23	14.29	14.34	14.40	14.45	14.50
Irradiation Ratio (rear/front)	10%					

* For Nexttracker installations, maximum static load please take compatibility approve letter between JA Solar and Nexttracker for reference.



Headquarters

No. 8 Building, Nuode Center, No.1 Courtyard, East Auto Museum Road,
Fengtai District, Beijing
Tel: +86 10 6361 1888 Fax: +86 10 6361 9999
E-mail: sales@jasolar.com marketing@jasolar.com www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

Version No. : Global-EN-20241105A