


LOW VOLTAGE BATTERY

The LB-16D-G3 is a deep cycle high capacity LFP battery with improved safety, long lifespan, and optimized user experience. It has superior performance with a capacity of 16 kWh for a single unit and a maximum of 256 kWh for 16 batteries in parallel, which can meet the residential electricity demand.

LB-16D-G3

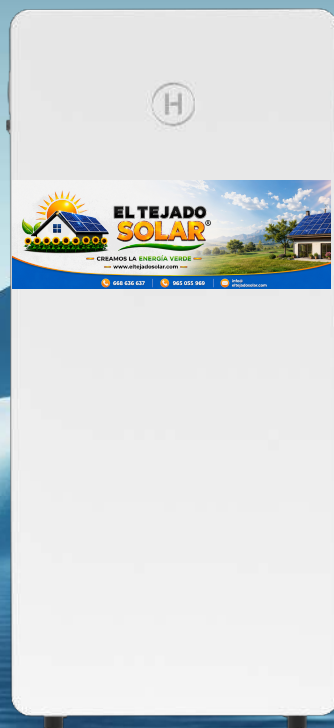

Features

- 01 LFP with improved safety design
- 02 Provides long-lasting performance with 314 Ah cells
- 03 Quick connector design for easy installation
- 04 Enables low-temperature charging with an optional heating function
- 05 Flexible capacity options from 16 kWh to 256 kWh
- 06 Designed for indoor/outdoor installation with IP65 protection

Technical Specifications

Model	LB-16D-G3	
System Data		
Battery type		LiFePO ₄
Rated capacity (Ah)		314
Total energy (kWh)		16
Rated voltage (V)		51.2
Voltage range (V)		44.8-58.4
Max. continuous charging/discharging current (A)	157	
Peak charging/discharging current (A)	235 (10s)	
Communication	CAN	
Recommended depth of discharge (DOD)	90%	
Max. parallel quantity	16	
Protection		
Overvoltage and undervoltage protection	Integrated	
Overcurrent protection	Integrated	
Overtemperature and undertemperature protection	Integrated	
DC breaker	Integrated	
Heating	Optional	
General		
Dimensions (W × H × D [mm]) ⁽¹⁾	410 × 886 × 236	
Weight (kg) ⁽¹⁾	115	
Installation Environment	Indoor / Outdoor	
Mounting	Wall-mounted / Floor-standing	
Wall-mounted bracket / Wheels (4 pcs)	Optional	
Charging temperature (°C)	0 to +55 (-20 to +55 with optional heating)	
Discharging temperature (°C)	-20 to +55	
Protection degree	IP65	
Cooling	Natural convection	
Altitude (m)	≤2000	
Cycle life (25°C, 0.5C)	8000 Cycles, 90% DOD, 70% EOL	
Certification	IEC 62619, UN 38.3, CE-EMC	
Warranty ⁽²⁾	5-10 Years	

(1) The actual dimensions and weight may differ. For details, please contact Hoymiles sales.

(2) Please refer to Hoymiles Warranty Terms & Conditions for more details.